

FRAME SHIELD

1	A
2	A \
3	B
5	B \
6	Z
7	Z \
8	GND
4	+5
9	NC

FRAME SHIELD

1	A
9	A \
2	B
10	B \
3	Z
11	Z \
8	GND
4	NC
5	NC
6	NC
7	NC
12	NC
13	NC
14	NC
15	NC

WHITE-ORANGE

ORANGE-WHITE

WHITE-GREEN

GREEN-WHITE


WHITE-BROWN

BROWN-WHITE

WHITE-BLUE


**LONGUEUR DES CABLES: DB15 TO DB9:13 IN.
DB9 TO DB9 : 9 IN.**

DB 9 MALE HOOD (4X)

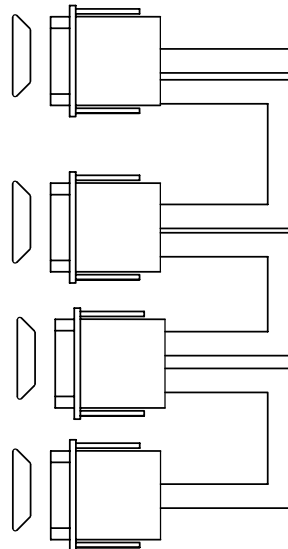

LOW CAP AWG 24 SHIELD

DB 15 MALE HOOD

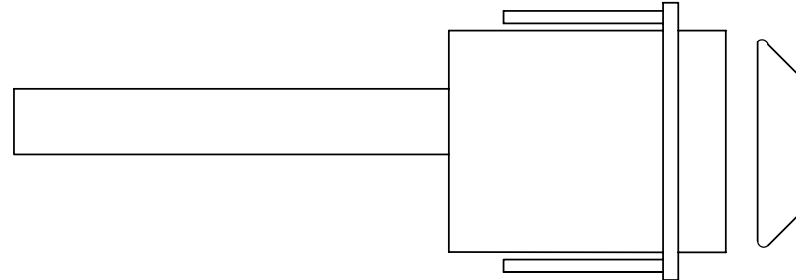

LONG THUMBSCREW (5X)
STRAIGHT CONNECTOR

RÉVISIONS	Description	Date	Par

ASSEMBLAGE DE REFERENCE

OPÉRATIONS

TOLERANCES NON SPECIFIÉES

À Fab.

Par Mach.

Titre: ENCODER SPLIT CABLE DRIVE (4X)

ECHELLE

1:2

ANGLES

FRACTIONS

DÉCIMALES

±1/2

±1/64

.XXX ±0,005
.XXXX ±0,0005

Matériel

Projet Machine:

ITEM:

5108006A

NO. PAGES

1 DE 1

FOURNISSEUR

Dessiné

J BERUBE

26.02.10

Vérifié

Approuvé

